



DesignStand Alpha for NEXO STM/M

The Excellent Line offers the perfect balance between purist design and functional technology for first-class atmosphere.

The new Excellent Line Alpha was specially developed for the high-end entertainment sector, making it the perfect complement to NEXO loudspeakers.



Applications

indoor stand for NEXO loudspeakers



Height Options

NEXO STM/M Series
min. 150 cm | max. 270 cm



Adapter Heads

adapter heads for NEXO Series STM/M



Baseplates

BP1000
with decentralized mount

Components for NEXO



BP1000

Adapter Heads

NEXO STM/M adapter head | 17 kg

Extensions

10 x 10 cm quadratic pipes
100 cm | 6.4 kg
80 cm | 5.4 kg
60 cm | 4.4 kg

Baseplates

BP1000 | 61 kg




Baseplate BP1000

Color: RAL 9005

The baseplate BP1000 is designed for heavy subwoofers such as NEXO S118 and NEXO MSUB15. This baseplate is the choice for NEXO STM M46, NEXO M28, NEXO M10 and NEXO M6 line arrays.



NEXO STM/M Series Compatibility

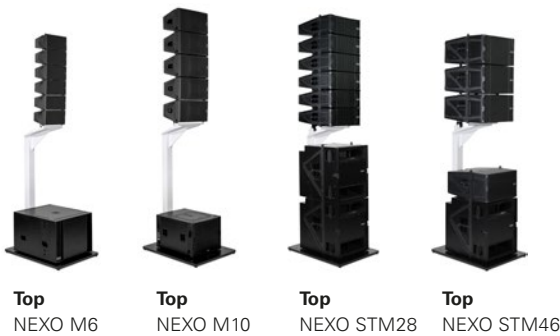

All NEXO STM/M tops work with BP1000 and can be combined with any suitable bass.

Adapter Head for NEXO STM/M Series


Farbe: RAL 7035




The NEXO STM/M adapter head has changeable bars for the different line arrays. The maximum load is 240 kg, which is the weight of four NEXO M46 cabinets. The overall height of the ground stack is 4 m. The first cabinet can be tilted in negative and positive directions.



Height Options



Baseplate and Mount
for NEXO STM/M Series

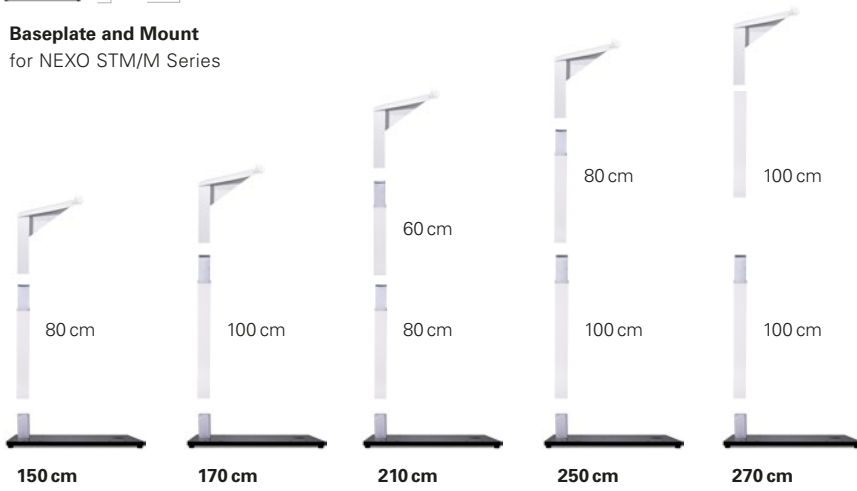

NEXO STM/M Series



Architectural specifications

Highquality stand made for
NEXO STM/M

The highquality aluminium stand is built from a combination of several 10 x 10 cm square tubes in the length of 60 cm, 80 cm and 100 cm and with a customized point source head section for NEXO STM/M.

The lowest element of the line source element can be tilted positively or negatively. The point source element can be tilted positively and negatively. The maximum height of the stand including the loudspeaker is 4 m. The maximum load with NEXO STM/M line source elements is 240 kg. The baseplate is made of solid aluminium, 100 cm x 75 cm x 3 cm (plus 2 cm rubber foot), with an insertion for the square tubes. For anchoring points, there are eight holes provided for M8 bolts. The square tubes are hollow and can be used for cable management. Different heights can be achieved by combining the square tubes. The square tubes and the head sections are powder-coated in RAL 7035 paint; the baseplate is in RAL 9005 paint. All the elements of the stand are equipped with holes or threads for an electrical potential equalization.

The stand set contains the following components:

- 1 x Baseplate BP1000, 100 cm x 75 cm x 3 cm, RAL 9005
- 2 x Square tube 100 cm, RAL 7035
- 1 x Square tube 80 cm, RAL 7035
- 1 x Square tube 60 cm, RAL 7035
- 1 x Head section for NEXO STM/M line source speaker, RAL 7035
- 1 x Mounting device for NEXO STM M46/M28
- 1 x Mounting device for NEXO M6
- 1 x Mounting device for NEXO M10

Manufacturer

H.O.F. ALUTEC
Metallverarbeitungs
GmbH & Co. KG

Article

Excellent Line
Alpha for NEXO STM/M

Manufacturer



H.O.F. ALUTEC Metallverarbeitungs GmbH & Co. KG

Brookstrasse 8 | D-49497 Mettingen | Phone +49 (0) 54 52 – 97 33 10 | Fax +49 (0) 54 52 – 97 33 19 | sales@h-of.de