




Excellent
Line

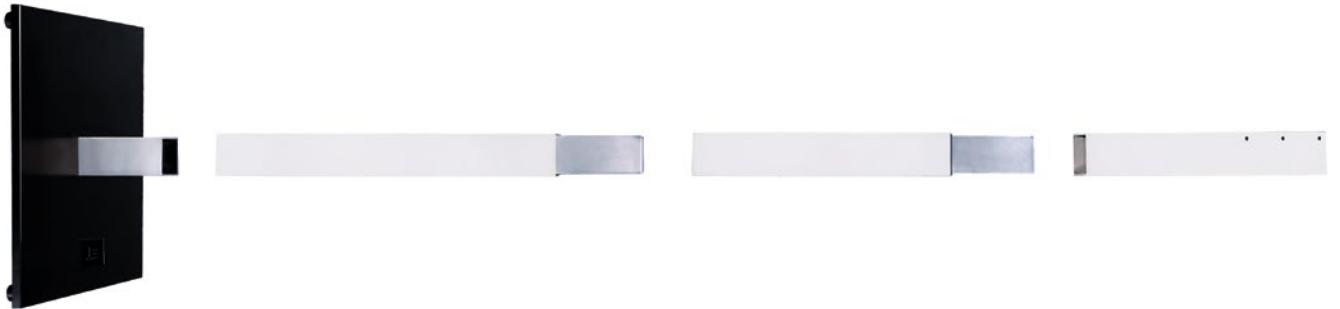

Functional
Purism

Functional Purism

Excellent Line offers the perfect balance between purist design and functional technology for first-class atmosphere.



06 / D Line

The All-rounder

08 / DesignStand D2
12 / DesignStand D4
16 / Basic Elements



20 / S Line

The Display Stand

22 / DesignStand S2
26 / DesignStand S3
30 / Basic Elements
32 / Attachments



36 / P Line

The PA Tower

38 / DesignStand P6
42 / DesignStand P6 plus



48 / Drop Line

The Variable Drop

50 / Dropdown

D Line

The All-rounder



The DesignStand D2 and D4 are the foundation of Excellent Line. The stand can be built at different heights through the simple assembly of different lengths of quadratic pipes. The load-bearing capacity of the D line is comparable to a large tower lift. Power cables are routed straight through the bottom of the baseplate into the quadratic pipe. Video projectors, moving lights, and loud speakers, among other implements, can be attached with different mountings.

Safety-related planning requirements have been structurally taken into account. Optional weights can be used to secure and prevent the Design Stand from tipping in case of a collision, or if installed in a windy hall.

DesignStand D2



Applications

Indoor stand for light,
sound and video



Height Options

60 cm | 100 cm
120 cm | 140 cm
160 cm | 180 cm
200 cm | 240 cm



Mountings

Universal plate
35 cm x 45 cm
*for video projectors
and moving lights*
Universal T-Bar
120 cm x 5 cm
*for spotlights and
speakers*



Capacity


max. recommended
load 500 kg, down-
load the datasheet
from our website for
more details



Baseplate


with central mount

D2 Set Components

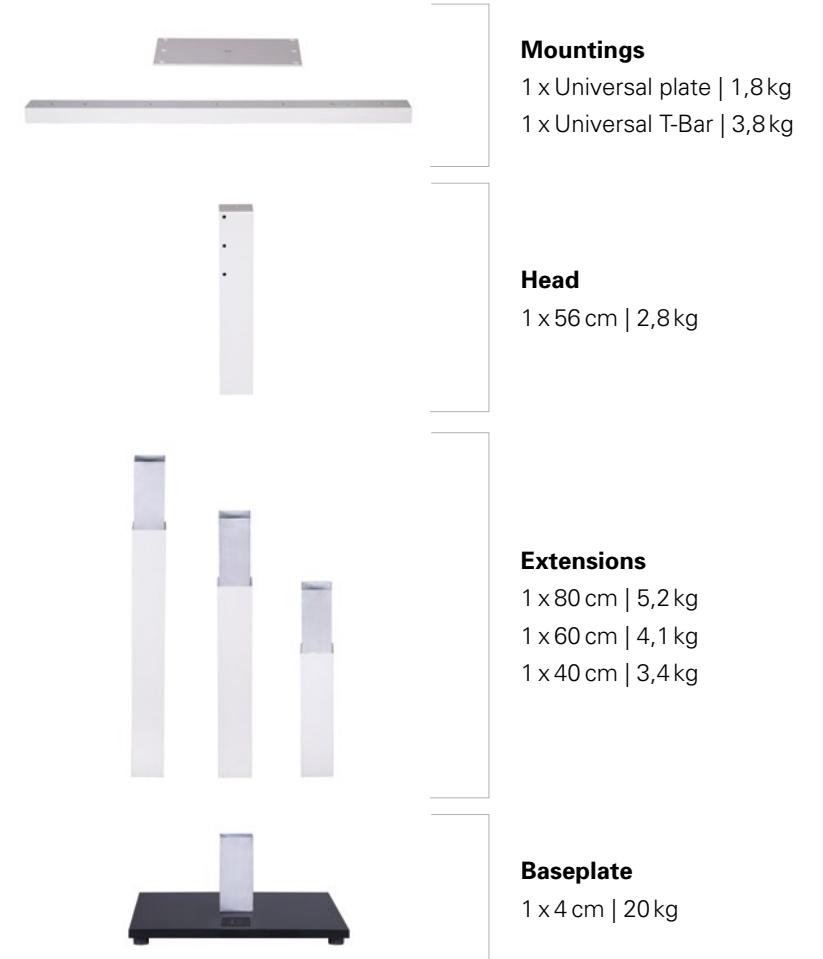


Height Options

Color (Extensions): RAL 7035

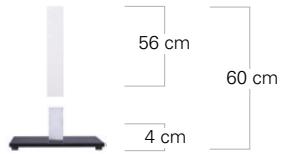


Baseplate and Head

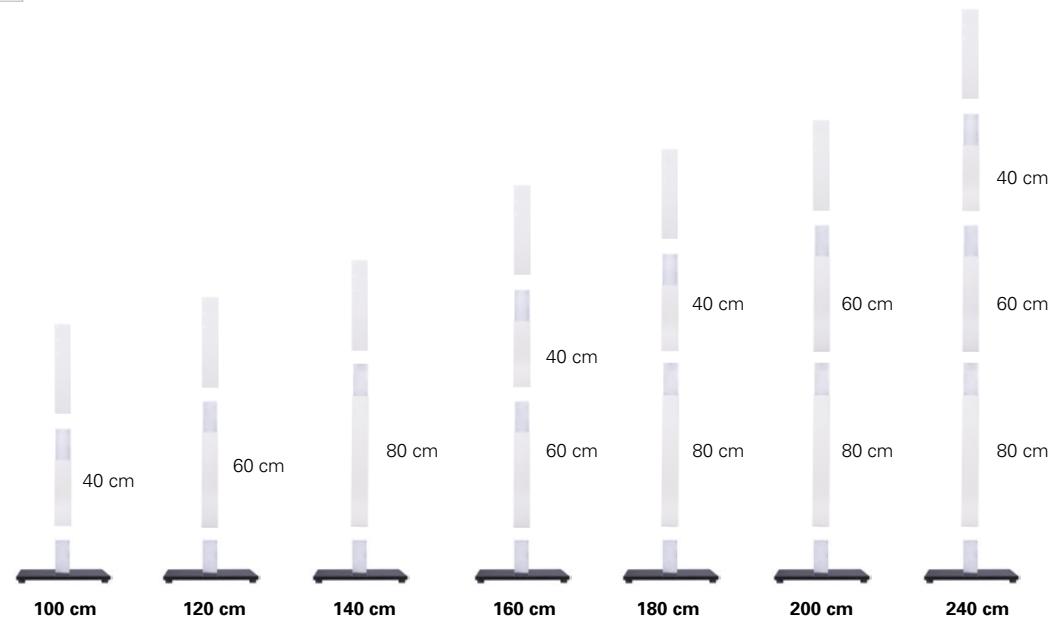

Baseplate

Color: RAL 9005

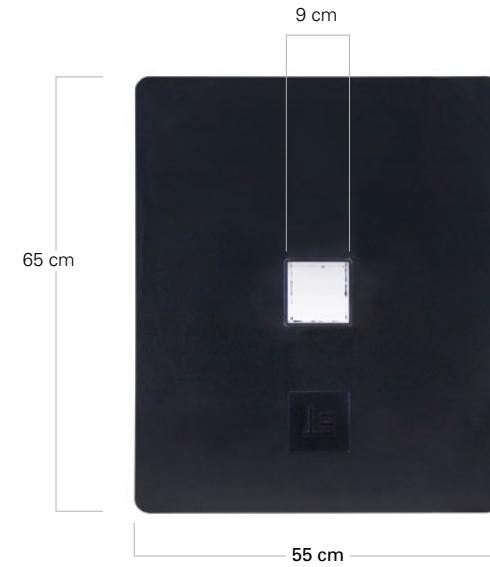

DesignStand D4



Applications

Indoor stand for light,
sound and video



Height Options

120 cm | 140 cm
160 cm | 200 cm
220 cm | 240 cm
260 cm | 300 cm
320 cm | 340 cm
400 cm



Mountings

Universal plate
35 cm x 45 cm
*for video projectors
and moving lights*
Universal T-Bar
120 cm x 5 cm
*for spotlights and
speakers*



Capacity


max. recommended
load 500 kg, down-
load the datasheet
from our website for
more details



Baseplate

with central mount

D4 Set Components

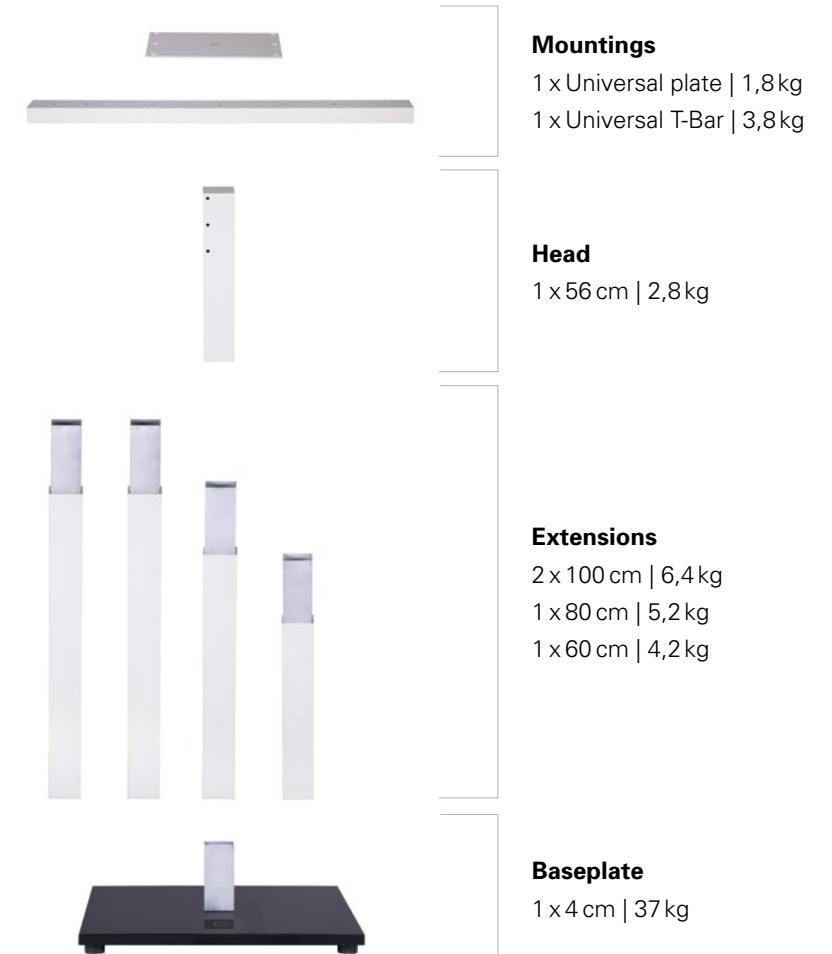

Mountings

1 x Universal plate | 1,8kg
1 x Universal T-Bar | 3,8kg

Head

1 x 56 cm | 2,8 kg

Extensions

2 x 100 cm | 6,4 kg
1 x 80 cm | 5,2 kg
1 x 60 cm | 4,2 kg

Baseplate


1 x 4 cm | 37 kg

Height Options

Color (Extensions): RAL 7035




Baseplate and Head

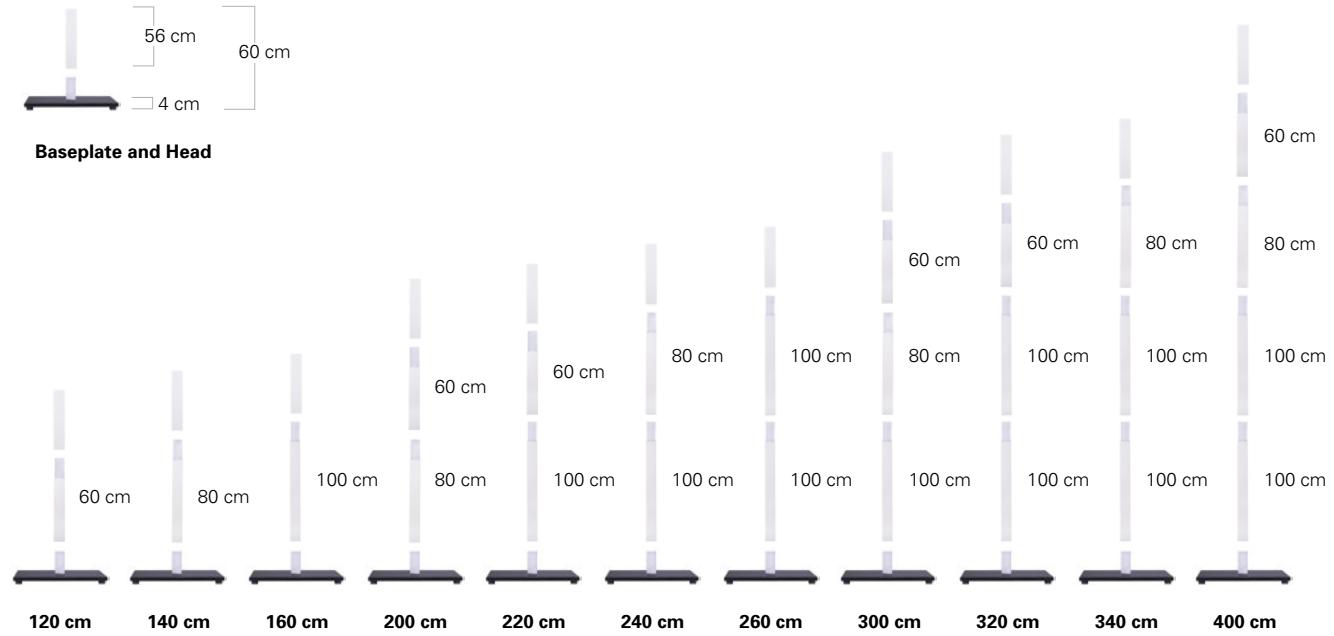

Baseplate

Color: RAL 7035

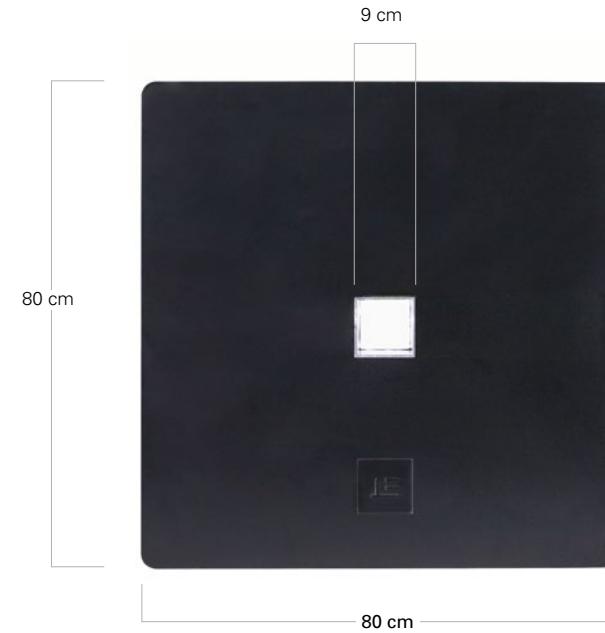

Basic Elements


Head

Color: RAL 7035



Mountings

Color: RAL 7035

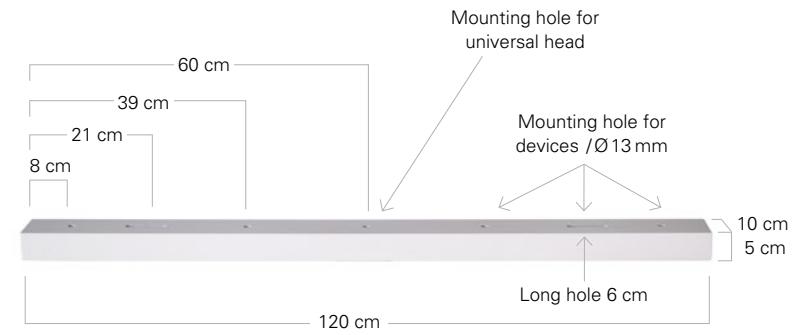

Universal T-Bar



Universal plate



 D4  220cm  Universal plate with projectors



 D4  400cm  Universal T-Bar with exhibitions lamps

S Line The Display Stand



The DesignStand S2 and S3 are optimized for use with video displays. The decentralized mount on the baseplate can also easily accommodate large displays. The combination of the DesignStand's proven extension technique and flexible display holder can build stage preview monitors, straight or slanted touchscreens, and classic trade fair displays. Different options, like the stacking table, complement the S Line.

Safety-related planning requirements have been structurally taken into account. Optional weights can be used to secure and prevent the Design Stand from tipping in case of a collision, or if installed in a windy hall.

DesignStand S2



Applications

This indoor stand for flatscreens can be used for trade show displays, as a pre-view monitor, or as a touch-screen table. The display holder can accommodate slanted projectors.



Image Center

min. 42 cm
max. 200 cm



Mountings

Display holder
120° rotatable



Capacity

recommended
diagonal display
max. 60 inches
max. 125 kg



Baseplate

with decentralized
mount

S2 Set Components



Mountings

1 x Display holder for VESA mount up to 30 x 30 cm, Audipack L&S5, or mounting on M10 screwthreads | 2,6 kg



Head

1 x 56 cm | 2,8 kg



Extensions

1 x 80 cm | 5,2 kg
1 x 60 cm | 4,1 kg
1 x 40 cm | 3,4 kg




Baseplate with decentralized mount (-15 cm from the center)

1 x 4 cm | 20 kg

Height Options

Color (Extensions): RAL 7035

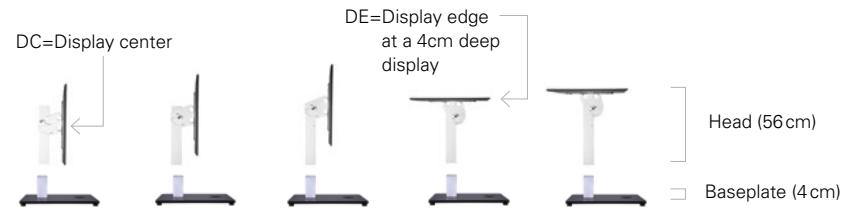

- Mounting 1** DC: 42 cm
- Mounting 2** DC: 51 cm
- Mounting 3** DC: 60 cm
- Mounting 4** DE: 63 cm
- Mounting 5** DE: 72 cm


Mounting 1: 90° / Hole 1

Mounting 2: 90° / Hole 2

Mounting 3: 90° / Hole 3

Mounting 4: 180° / Hole 2


Mounting 5: 180° / Hole 3

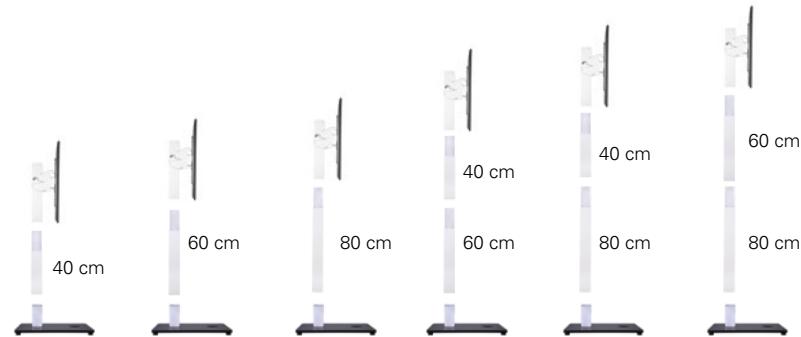

- | | | | | | |
|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Mounting 1
DC: 82 cm | Mounting 1
DC: 102 cm | Mounting 1
DC: 122 cm | Mounting 1
DC: 142 cm | Mounting 1
DC: 162 cm | Mounting 1
DC: 182 cm |
| Mounting 2
DC: 91 cm | Mounting 2
DC: 111 cm | Mounting 2
DC: 131 cm | Mounting 2
DC: 151 cm | Mounting 2
DC: 171 cm | Mounting 2
DC: 191 cm |
| Mounting 3
DC: 100 cm | Mounting 3
DC: 120 cm | Mounting 3
DC: 140 cm | Mounting 3
DC: 160 cm | Mounting 3
DC: 180 cm | Mounting 3
DC: 200 cm |
| Mounting 4
DE: 103 cm | Mounting 4
DE: 123 cm | Mounting 4
DE: 143 cm | Mounting 4
DE: 163 cm | Mounting 4
DE: 183 cm | Mounting 4
DE: 203 cm |
| Mounting 5
DE: 112 cm | Mounting 5
DE: 132 cm | Mounting 5
DE: 152 cm | Mounting 5
DE: 172 cm | Mounting 5
DE: 192 cm | Mounting 5
DE: 212 cm |

Baseplate

Color: RAL 9005

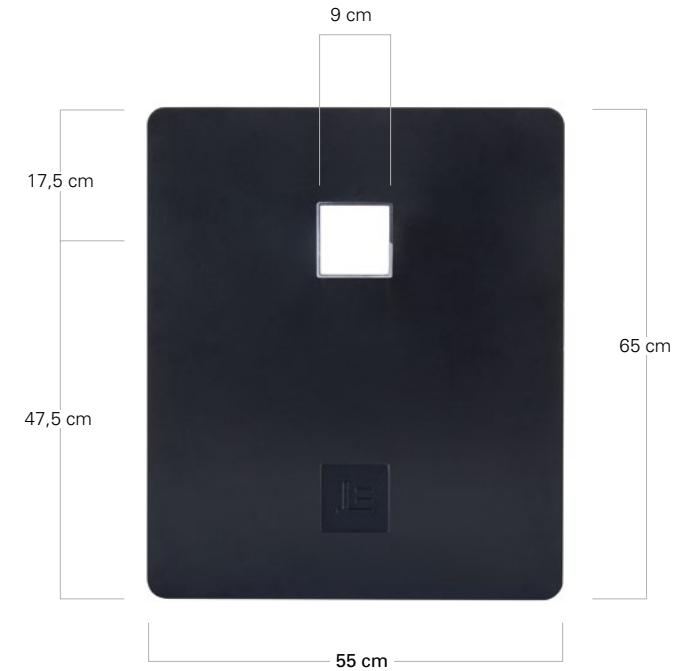

DesignStand S3



Applications

This indoor stand for flatscreens can be used for trade show displays, as a pre-view monitor, or as a touch-screen table. The display holder can accommodate slanted projectors.



Image Center

min. 42 cm
max. 300 cm



Mountings

Display holder
120° rotatable



Capacity

recommended
diagonal display
starting from
ca. 60 Zoll
max. 125 kg



Baseplate

with decentralized
mount

S3 Set Components



Mountings

1 x Display holder for VESA mount up to 30 x 30 cm, Audipack L&S5, or mounting on M10 screwthreads | 2,6 kg



Head

1 x 56 cm | 2,8 kg



Extensions

1 x 100 cm | 5,2 kg
1 x 80 cm | 5,2 kg
1 x 60 cm | 4,1 kg



Baseplate with decentralized mount (-15 cm from the center)

1 x 4 cm | 37 kg

Height Options

Color (Extensions): RAL 7035



- Mounting 1** DC: 42 cm
- Mounting 2** DC: 51 cm
- Mounting 3** DC: 60 cm
- Mounting 4** DE: 63 cm
- Mounting 5** DE: 72 cm


Mounting 1: 90° / Hole 1

Mounting 2: 90° / Hole 2

Mounting 3: 90° / Hole 3


Mounting 4: 180° / Hole 2

Mounting 5: 180° / Hole 3

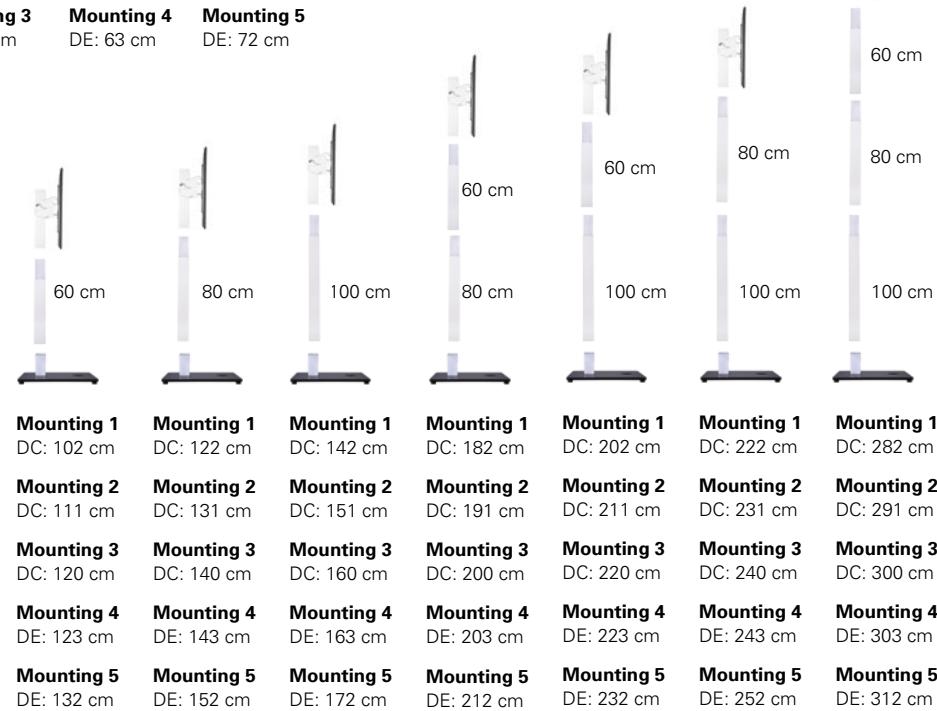

Baseplate

Color: RAL 9005

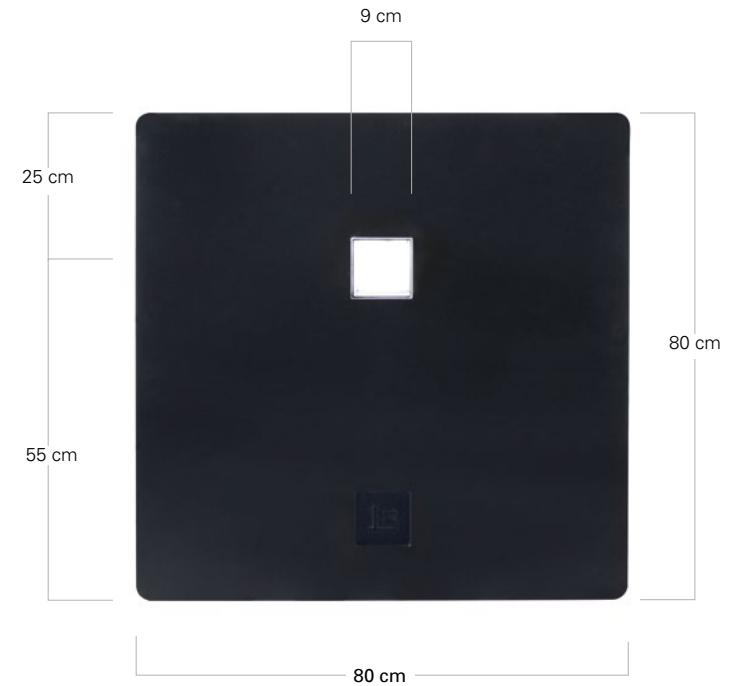

Basic Elements

Head

Color: RAL 7035



Display Holder

Color: RAL 7035


Display holder

The display holder can accommodate the following VESA measurements:

- 7,5 cm x 7,5 cm
- 10 cm x 10 cm
- 10 cm x 20 cm
- 20 cm x 30 cm
- 30 cm x 30 cm

The M10 screw thread is located directly over the universal head when the display is in the 180° position.

The Audipack bracket L&S5 (Ref 390967) can also be mounted.

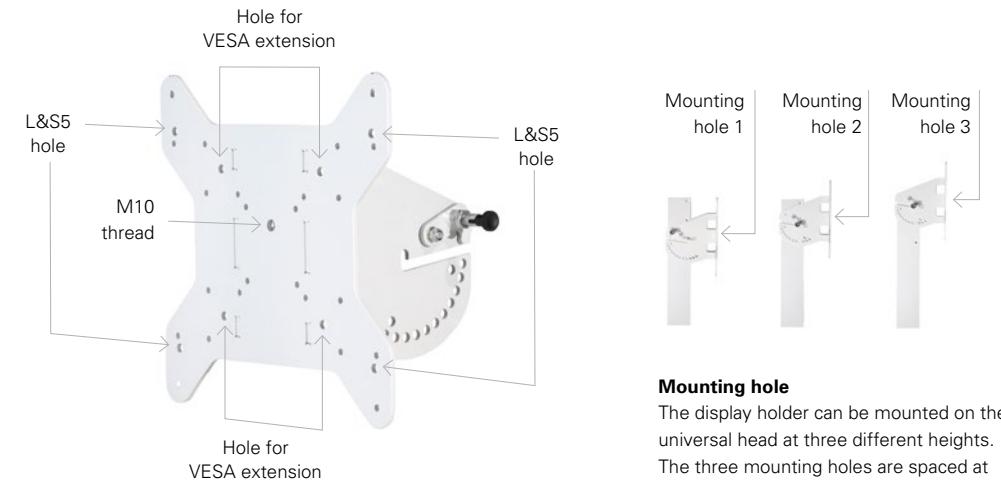


Mounting hole
The display holder can be mounted on the universal head at three different heights. The three mounting holes are spaced at 8,5 cm intervals.

Possible Angles

Color: RAL 7035

Rotation

When mounting the display holder in mounting hole two and three, the display holder can rotate in 10° steps.

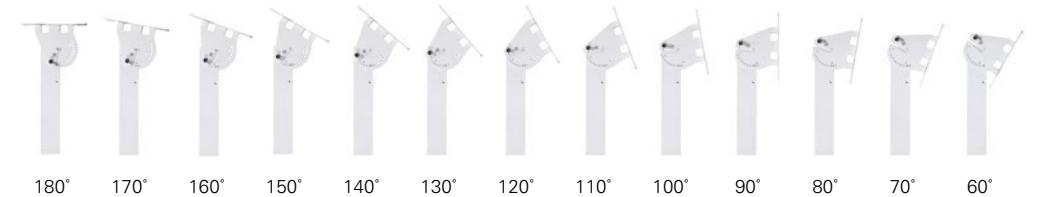


Options and Attachments



Stacking table

A stacking table can be mounted at each joint and on all of the models of the Design Pedestals to support laptops or keyboards. The table has a surface of 35 cm x 45 cm. The table and all Excellent extension components have an opening of 2 cm x 3 cm. This port is suitable for USB or power supply connections with most laptop and cable manufacturers.

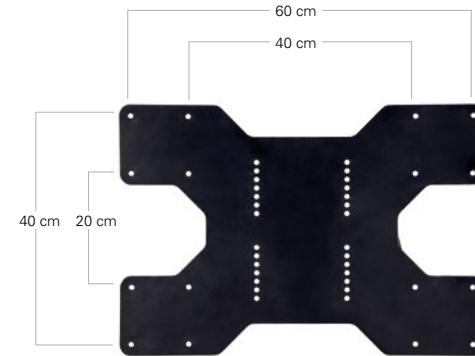

VESA extension

A VESA extension can be screwed directly into the display bracket for displays with a VESA dimension larger than 30 cm x 30 cm. The VESA extension can also be mounted at a 90° angle on the display bracket.




Wheel options

The baseplates S2 and S3 can be delivered with 32 M6 steel screw threads. Each corner contains four steel screw threads at a distance of 6 cm x 8 cm for Bluewheels (ex/ Guitel 37024) and four steel screw threads at a distance of 3,5 cm x 3,5 cm for small wheels (ex/ Guitel 3703).



└ S2 ⏏ 180cm ┌ Display holder, Landscape

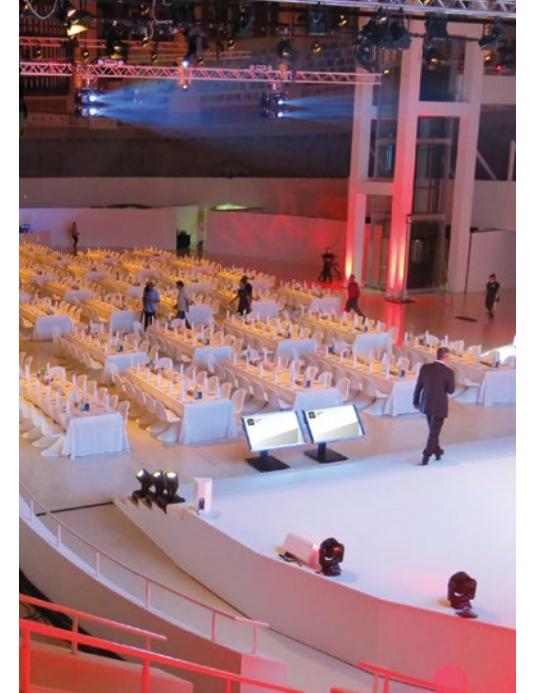

└ S2 ⏏ 60cm ┌ Display holder, Landscape

P Line The PA Tower



An elegant stage is very important at gala events or presentations. The DesignStand P6 is the elegant stand for the discreet, efficient Line Array systems.

The DesignStand P6 can bring a Line Array system up to a height of approximately 6m with a chain hoist.

DesignStand P6



Applications
Indoor stand
for speakers



Height Options
250 cm | 350 cm
450 cm



Mountings
Head Section P6
with intake for
chain hoist



Capacity
max. 150 kg
total load



Baseplate
with decentralized
mount

P6 Set Components



Mountings

1 x Head Section P6 | 13 kg

Extensions

2 x 200 cm | 12 kg
1 x 100 cm | 6,4 kg

**Baseplate with
decentralized mount**

1 x 3 cm | 70 kg

Height Options

Color (Extensions): RAL 7035



Baseplate

Color: RAL 7035



Head Section P6

Color: RAL 7035



DesignStand P6 plus



Applications

Indoor stand
for speakers



Height Options

250 cm | 350 cm
450 cm | 550 cm
550 cm | 650 cm



Mountings

Head Section P6
with intake for
chain hoist



Capacity

max. 150 kg
total load



Baseplate

with decentralized
mount

P6 plus Set Components



Mountings

1 x Head Section P6 | 13 kg

Extensions

3 x 200 cm | 12 kg
1 x 100 cm | 6,4 kg

Baseplate with decentralized mount

1 x 4 cm | 95 kg

Height Options

Color (Extensions): RAL 7035



Baseplate


Color: RAL 7035



Head Section P6

Color: RAL 7035



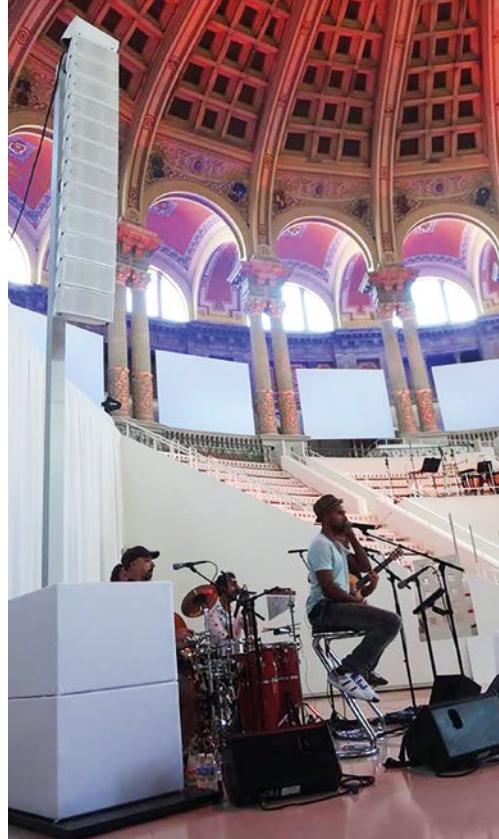

└ P6 ⏏ 450cm ┌ 12x NEXO GEO M6




└ P6 ⏏ 450cm ┌ 5x NEXO GEO M6



└ P6 ⏏ 450cm ┌ 9x NEXO GEO M6

Drop Line The Variable Drop

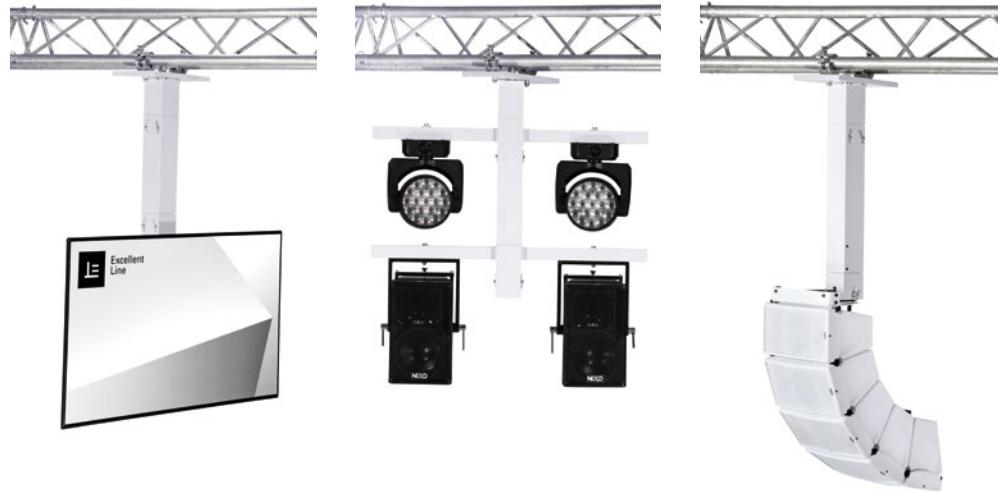

The Excellent Line Drop Line expands the possibilities of the D, S, and P line. If the height options of the D, S, or P line are no longer sufficient, the Excellent Line Drop Line can be hung from a 30 or 40 cm wide truss variable in order to position speakers or lamps.

The Excellent Line Drop can be used in difficult spatial situations when it's not possible to mount a stand on the floor. The stackable extensions are each connected with two bolts. The truss basement can turn the drop in infinite variations and, for example, precisely align speakers.

Dropdown



Applications

Variable indoor drop system to mount video, light, and sound equipment.



Height Options

60 cm | 100 cm
120 cm | 140 cm
160 cm | 180 cm
200 cm | 240 cm



Mountings

M10 thread on drop universal head, drop universal mounting at the connection point.



Capacity

max. recommended load 150 kg

Dropdown Components



Truss Basement

1 x 17 cm | 12 kg



Drop Extensions

1 x 80 cm | 5,2 kg
1 x 60 cm | 4,1 kg
1 x 40 cm | 3,4 kg



Mountings

1 x Drop Universal Mounting | 3 kg




Drop Universal Head

1 x 43 cm | 4 kg

Optional Lengths

Color (Extensions): RAL 7035

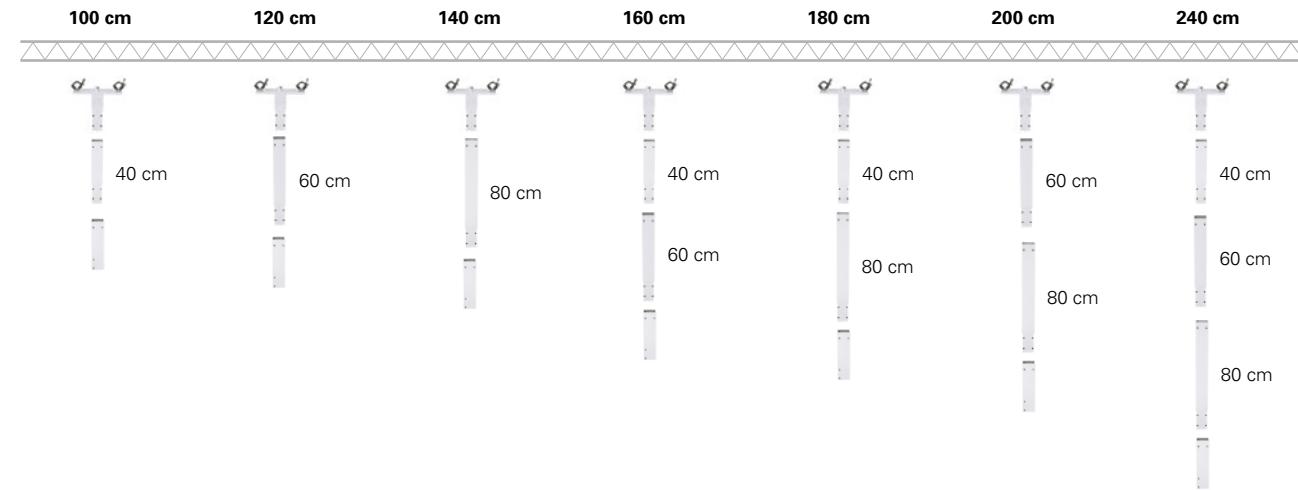

Truss Basement and Drop Universal Head

Truss Basement

Color: RAL 7035



Drop Universal Head


Color: RAL 7035




Drop Universal Mounting

Color: RAL 7035

One or more drop universal mountings can be installed in an Excellent Line Drop Line. It can carry a symmetrical load of max. 100 kg.

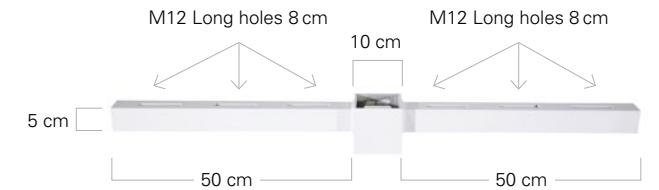

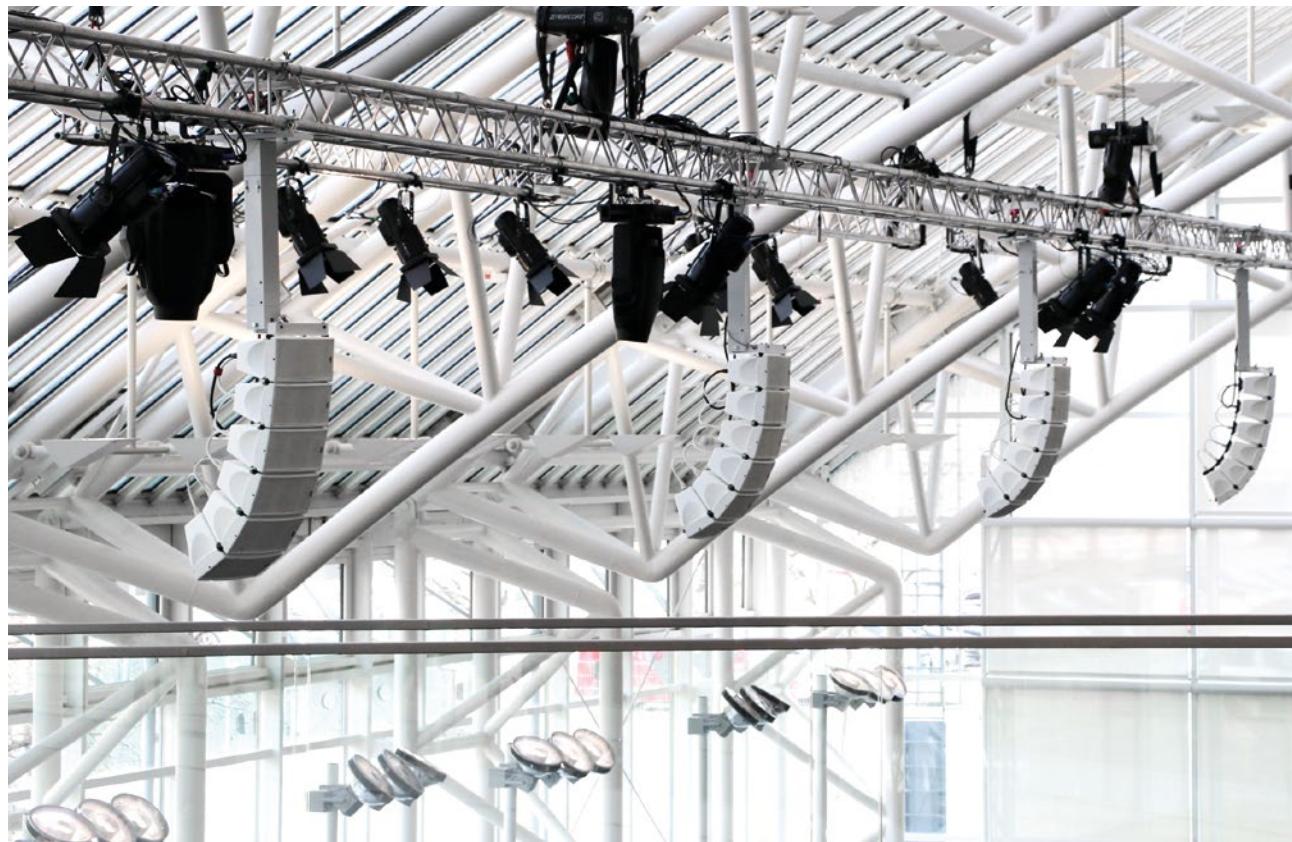

└ Dropdown ⇄ 80 cm T 6x NEXO GEO M6



└ Dropdown ⇄ 60 cm T 6x NEXO GEO M6

Easy Ordering Process

Let us advise you about the capabilities of
Excellent Line:

+49 (0) 54 52 – 97 33 10

The components of Excellent Line are manufactured
and distributed by H.O.F. ALUTEC GmbH. Our whole
product range can be found here.



H.O.F. ALUTEC GmbH

Brookstrasse 8
D-49497 Mettingen

Phone +49 (0) 54 52 – 97 33 10

Fax +49 (0) 54 52 – 97 33 19

sales@hof-alutec.com

www.excellent-line.com