



Info Sheet DesignStand P6 plus

The combination of the elegant design stand with reliable event technology enables sophisticated and first-class solutions. The equipment fully performs within the public's line of vision yet is discretely integrated in the space.



Applications

Indoor stand
for speakers



Height Options

250 cm | 350 cm
450 cm | 550 cm
550 cm | 650 cm



Mountings

Head Section P6
with intake for
chain hoist



Capacity

max. 150 kg
total load



Baseplate

with decentralized
mount

P6 plus Set Components



Mountings

1 x Head Section P6 | 13 kg

Extensions

3 x 200 cm | 12 kg
1 x 100 cm | 6,4 kg


Baseplate with decentralized mount

1 x 4 cm | 95 kg



Height Options

Color (Extensions): RAL 7035

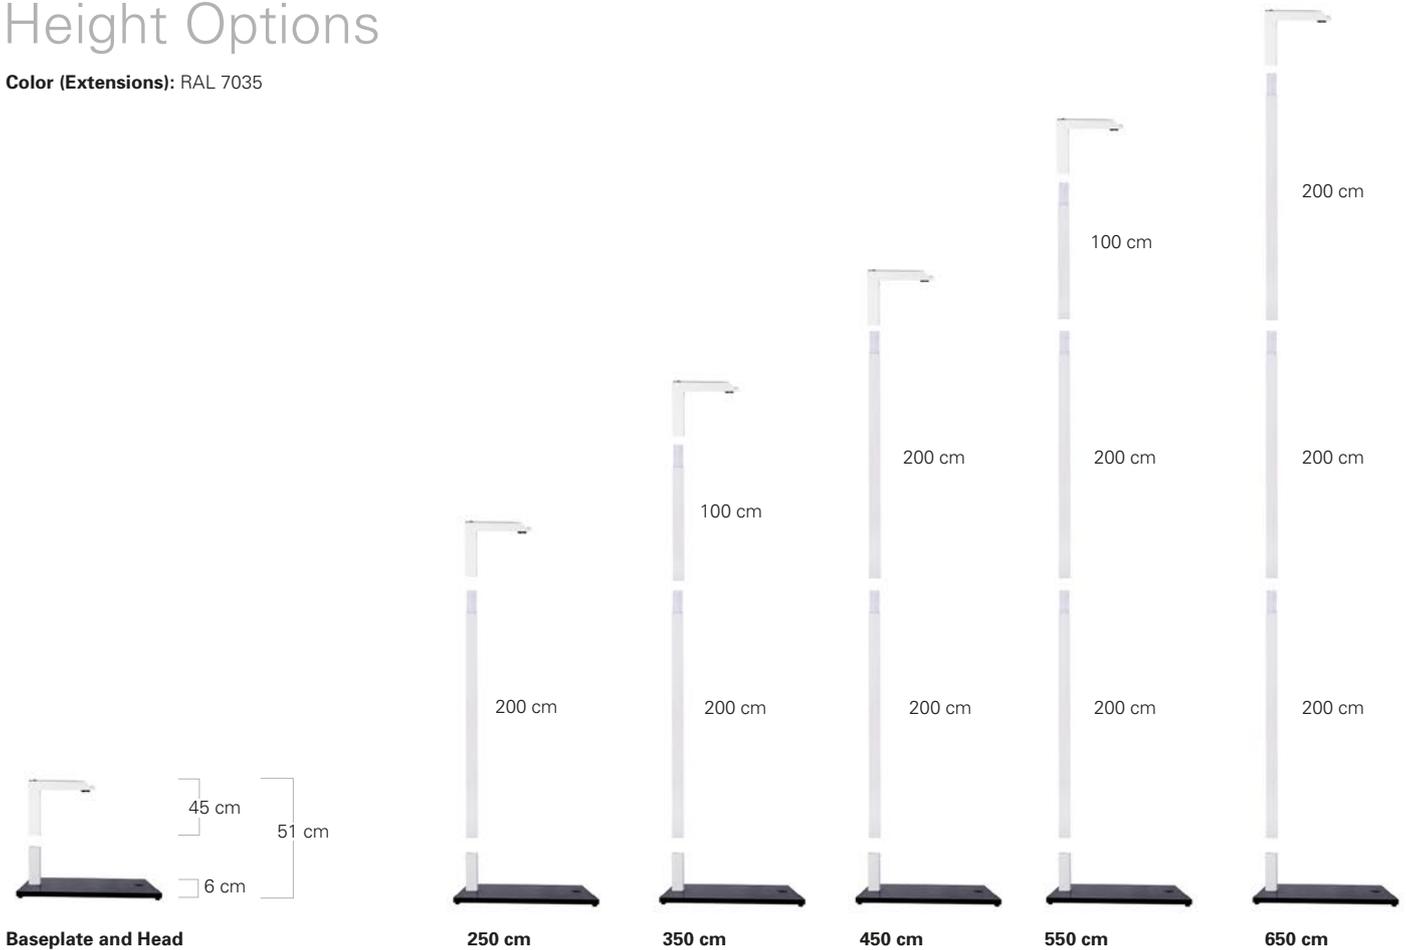

Baseplate

Color: RAL 7035



Head Section P6

Color: RAL 7035





Impressions



Excellent Line DesignStand P6 Plus

High-quality, quadratic column stand with rectangular baseplate for mounting loudspeaker systems.

The high-quality aluminum stand is composed of several 10 cm quadratic pipes in lengths of 100 and 200 centimeters.

The baseplate is made from solid aluminum, 75 cm x 120 cm x 4 cm (plus 2 cm rubber foot), with decentralized mounting for the square column. The top of the stand offers a head-section with an eyelet for a chainhoist. The maximum load contains 150kg by an approximately height of 650cm. The square pipes are hollow and can be used to run cables. One

can obtain varying heights through different combinations of the square pipes. The square tubes, display bracket and head unit are RAL color 7035. The baseplate is powder-coated in RAL color 9005.

The stand set contains the following components:

- 1 x Baseplate 120 cm x 75 cm x 4 cm, RAL 9005
- 1 x Quadratic pipe 100 cm, RAL 7035
- 3 x Quadratic pipe 200 cm, RAL 7035
- 1 x Head Section P6 45 cm, RAL 7035

Manufacturer

H.O.F. ALUTEC

Article

Excellent Line
DesignStand P6 Plus

Manufacturer

H.O.F. ALUTEC GmbH & Co. KG

Brookstrasse 8 | D-49497 Mettingen | Telefon +49 (0) 54 52 – 97 33 10 | Fax +49 (0) 54 52 – 97 33 19 | sales@h-of.de

